

ATOM

COLORI DISPONIBILI Available colors
Antracite RAL 7039 RAL 7039 Anthracite

Atom senza staffa
Atom without bracket

m² 0.031
400x400x195mm

1 Pcs
42 pcs

Atom con staffa
Atom with bracket

m² 0.034
400x400x210mm

1 Pcs
42 pcs

Body and upper cover: cooling fins for maximum heat dissipation, in die-cast aluminum.

Paintwork: thermosetting polyester powder, prior degreasing and phosphochromatizing process that will ensure an extremely high resistance to chemical and atmospheric agents.

Protection diffuser and lenses: multi optic transparent methacrylate, satin finish details (PMMA), 90° and 120° beam.

LED: Samsung LH508A, CRI>80, CCT 4000K

Expected lifetime: 70.000h L80 B10 @ta25; 54.000h L80 B20 @tamax

Cable compartment: integrated into the main body, airtight, made of nylon fv, for excellent electrical and thermal insulation of the driver.



Power supply: 220-240V 50-60Hz, with electronic ballast, surge protection up to 6kV, NTC thermal sensor, ripple free, Active PFC system, SP system, fast plug waterproof connector.

Suspension kit: 4 steel security cables (distance ceiling/product - 44 cm), suspension ring.

Wall-ceiling rotating bracket: shaped steel 3 mm.

Available on request:


- DALI dimmable driver;
- CRI70;
- 1h maintained emergency;
- CCT 3000/5000K;
- customized LEDs current driving;
- tempered glass protection.

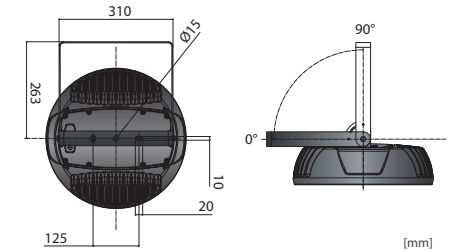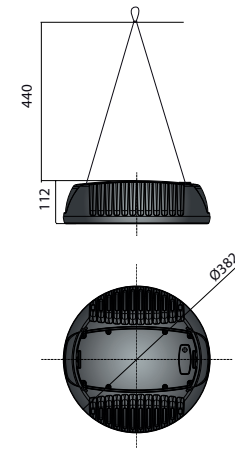


CODICE Code	CABLAGGIO Wiring	POTENZA Power(W)	FLUSSO NOMINALE Typical flux(lm)	FLUSSO NETTO Net output(lm)	CORRENTE Current	SPD (mA)	APERTURA FASCIO Spd(Kv)	PESO NETTO Net weight(Kg)
334643.012	24 LED LH508A	45W	7380	6515	700	6	120	8,99
334643.024	24 LED LH508A	92W	13620	12040	950	6	120	8,99
334643.036	36 LED LH508A	138W	20430	18060	950	6	120	9,06
334643.048	48 LED LH508A	184W	27240	24080	950	6	120	9,90
335643.012	24 LED LH508A	45W	7380	6605	700	6	90	8,99
335643.024	24 LED LH508A	92W	13620	12200	950	6	90	8,99
335643.036	36 LED LH508A	138W	20430	18300	950	6	90	9,06
335643.048	48 LED LH508A	184W	27240	24400	950	6	90	9,90
336643.012	24 LED LH508A	45W	7380	6515	700	6	120	10,05
336643.024	24 LED LH508A	92W	13620	12040	950	6	120	10,05
336643.036	36 LED LH508A	138W	20430	18060	950	6	120	10,12
336643.048	48 LED LH508A	184W	27240	24080	950	6	120	10,96
337643.012	24 LED LH508A	45W	7380	6605	700	6	90	10,05
337643.024	24 LED LH508A	92W	13620	12200	950	6	90	10,05
337643.036	36 LED LH508A	138W	20430	18300	950	6	90	10,12
337643.048	48 LED LH508A	184W	27240	24400	950	6	90	10,96

Con staffa
With bracket

code + DALI	Driver dimmerabile DALI DALI dimmable driver
code + 01	Kit di emergenza 1h 1h Emergency kit
933400.000	Vetro di protezione temperato Protection tempered glass
933400.001	Griglia di protezione Protection grid



Atom 24 LED 120°



Atom 36 LED 90°



IP66



IK 05



ta
35
+40



5
YEARS
Warranty



ATOM

Accessori- Accessories




Connettore ad innesto rapido fornito di serie
Fast plug connector supplied as standard



Vetro di protezione a richiesta (IK10)
Protection glass on request (IK10)
933400.000



Kit di sospensione in acciaio
fornito di serie
Steel suspension kit supplied
as standard



Griglia di protezione
Protection grid
933400.001



Atom con staffa di rotazione
Atom with rotating bracket



Kit di emergenza 1h SA
1h Maintained emergency kit

