



Silver Delta
ADI Awards
2016

EXTENDED FAMILY

iO 48V_186

iO_204

iO RECESSED PROFILE 394


iO SURFACE





				P	CCT	Beam	I	Flux	LOR
IO Surface	A263-00-10-	WT	NT	4,5W	2700K	20°	500mA	485Lm	92%
	A263-00-11-	WT	NT	4,5W	3000K	20°	500mA	505Lm	92%
	A263-00-12-	WT	NT	4,5W	4000K	20°	500mA	520Lm	92%
	A263-00-20-	WT	NT	4,5W	2700K	30°	500mA	485Lm	89%
	A263-00-21-	WT	NT	4,5W	3000K	30°	500mA	505Lm	89%
	A263-00-22-	WT	NT	4,5W	4000K	30°	500mA	520Lm	89%
	A263-00-30-	WT	NT	4,5W	2700K	56°	500mA	485Lm	86%
	A263-00-31-	WT	NT	4,5W	3000K	56°	500mA	505Lm	86%
	A263-00-32-	WT	NT	4,5W	4000K	56°	500mA	520Lm	86%

LED | 220-240 V~ | CE | IP20 | CRI>90 | L80B10 >40.000h

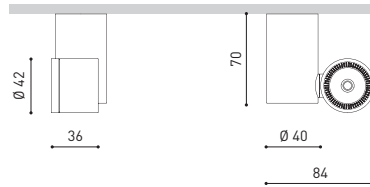

ACCESSORIES

NOT SOLD SEPARATELY

IO High Chromatic LED*



i » 366

IO Beam Mixer Diffuser*

0805-01-00



IO Anti-glare Honeycomb Louver*

0806-00-00 | WT | NT |



COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL | AL | PC |

i » 368

* AFFECTS THE LIGHTING PARAMETERS