




Snake LED



Modern LED luminaire

Materials: electrostatically painted aluminium housing (grey colour in standard). Possibility of painting in any color from RAL palette. OPAL diffuser.

Installation: suspended (suspensions 1,5 m in set)

Power: 230 V

ELECTRICAL DATA

Light source	LED
Luminaire power	78 W
Number of light sources	1
Light source power	75W
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes
Type of LED	5630

MECHANICAL DATA

Type of installation	Suspended
Housing material	Aluminum

INFORMATION

Colour	Grey
Operating temperature range	-15 ... 40 °C

CERTIFICATES

Degree of protection (IP)	IP40
Class of protection	I
Energy class	A++
CE	Yes
For ceiling installation, fire class "F" (L)	Yes

LIGHT DATA


Light colour	White
Color rendering index	83
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 52000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	89 %

OPTICAL DATA

Louver/ shutter	OPAL
Diffuser colour	White
Diffuser material	Opal plastic

AVAILABLE VARIANTS

Product code	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature
PX4090780	7590	97	3000K
PX4090788	7820	100	4000K

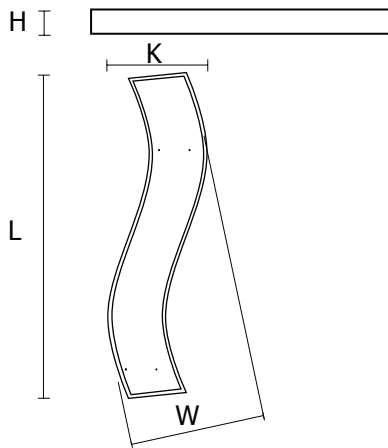

DIMENSIONS

L [mm]	W [mm]	H [mm]	K [mm]
1835	800	60	225

L = Length | W = Width | H = Height / Depth | K = Additional dimension

MOUNTING HOLES

A [mm]	B [mm]
1168	620

A = Spacing length | B = Spacing width