

FROST PLUS



BIM
ready

... for cold stores and freezing facilities with temperatures down up to -40 °C

USE


Temperatures of chilled foods range from 0-5 degrees, whilst in freezing facilities can drop up to -40 degrees Celsius. Suitable luminaires for such demanding environments must handle extreme low temperatures, withstand condensation and vapors, have low maintenance and long service life to keep costs low.

Our lighting fixture for freezing storage and chilled storage surroundings is made of ABS material, is weather-proofed and chemically resistant (IP66 and IK 06).

FROST PLUS provide with high quality and good solution enduring a long service life of 50 000 hours.

ADVATAGES

- Light fitting protection IP66
- Minimum ambient temperature down to $t_a = -40\text{ °C}$
- Lifetime: 50,000 hours / L90B10
- Diffuser: translucent acrylate (AC), UV stable, chemically resistant
- Body: dark grey ABS, UV stable, chemically resistant
- Standard model - CRI > 80: 4000 K
- At request CRI > 80: 3000 K, 5000 K, 6500 K, CRI > 90: 3000 K, 4000 K
- It can be delivered in dimmable version
- Through-wiring of up to 5 wires at body
- Certification: CE


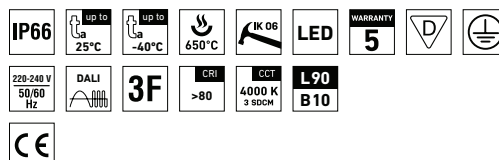


FROST PLUS



TECHNICAL DESCRIPTION

- Light fitting protection: IP66
- Minimum ambient temperature: $t_a = -40\text{ }^\circ\text{C}$
- Maximum ambient temperature: $t_a = 0\text{-}25\text{ }^\circ\text{C}$
- Maximum system efficacy: 150 lm/W
- The watt and lumen values can vary by $\pm 7,5\%$
- Standard model - CRI > 80: 4000 K
- MacAdam = 3 SDCM
- Lifetime: 50,000 hours / L90B10
- Diffuser: translucent acrylate (AC), UV stable, chemically resistant
- Body: dark grey ABS, UV stable, chemically resistant
- Reflector: steel sheet, white colour (RAL 9003)
- Clips: polyamide + 15% glass fibre
- Sealing: polyurethane (PUR), foamed body groove
- Cable glands: screwed PG 13.5
- Distance part: polyamide + 10% glass fibre
- Terminal block: screwless, three-pole (basic version)
- Installation: package contains stainless hooks and stainless brackets
- Electric equipment: LED modules, current driver



Code	Type	Min. ambient temperature [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting [lm]	Power consumption [W]	System efficacy [lm/W]	Net weight [kg]	A [mm]	D [mm]
For ambient temperature down to $t_a = 25\text{ }^\circ\text{C}$ - body: dark grey - diffuser: translucent acrylate									
103122	FROST PLUS 2.4ft 5200/840	-40	5150	4530	31	146	2,7	1172	700
103123	FROST PLUS 2.4ft 6400/840	-40	6260	5510	37	149	2,7	1172	700
103124	FROST PLUS 2.4ft 8800/840	-40	8710	7660	51	150	2,8	1172	700
103125	FROST PLUS 2.5ft 6500/840	-40	6380	5610	38	148	3,5	1452	940
103126	FROST PLUS 2.5ft 8000/840	-40	7750	6820	46	148	3,6	1452	940
103127	FROST PLUS 2.5ft 11000/840	-40	12050	10600	71	149	3,6	1452	940

Battery heating consumption 10W

FROST PLUS

Non-dimmable driver - plastic clips

Code	Type	3F
103122	FROST PLUS 2.4ft 5200/840	103128
103123	FROST PLUS 2.4ft 6400/840	103129
103124	FROST PLUS 2.4ft 8800/840	103130
103125	FROST PLUS 2.5ft 6500/840	103131
103126	FROST PLUS 2.5ft 8000/840	103132
103127	FROST PLUS 2.5ft 11000/840	103133


LEGEND

- 1F** 1-phase 3 core through-wiring in the luminaire
- 3F** 3-phase 5 core through-wiring in the luminaire
- M1h** emergency back-up source with 1 hour operating time for maintained emergency illumination
- M3h** emergency back-up source with 3 hour operating time for maintained emergency illumination
- 3F Mxh** 3-phase 5 core through-wiring in the luminaire (L3 used for emergency unit unswitched power supply)

- DALI** version with digital dimmable driver DALI
- DALI 1F** 1-phase 5 core through-wiring in the luminaire
- DALI 3F** 3-phase 7 core through-wiring in the luminaire
- DALI 3F Mxh** 3-phase 7 core through-wiring in the luminaire (L3 used for emergency unit unswitched power supply)

LIGHT FITTING ATTACHMENT

- a) Directly to a ceiling or a wall with the use of screws and stainless brackets
- b) Suspension with the use of stainless hooks
- c) Attachment with the use of side hangers to the wall

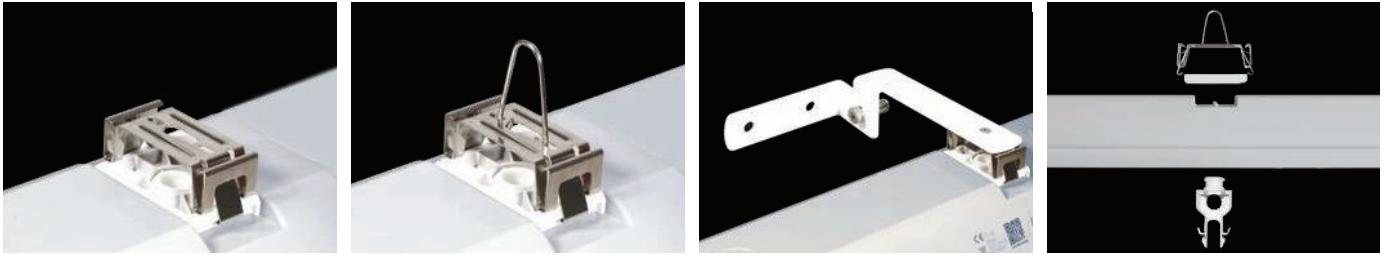**LIGHT FITTING DETAILED VIEW**

FROST PLUS

