



## Finestra IP44 LED



Energy-saving decorative lighting luminaire of modern and elegant shape equipped with LED light source from renowned producers. Finestra by universal form and type of assembly is suitable for public spaces, conference rooms, offices, communications, halls, stairways. The first-class AC power supply of renowned brands achieves  $\cos \phi > 0,95$ . This luminaire perfectly complements to the rest of the Finestra series of luminaires.

Attention: possibility of mounting "Active+" - self-learning energy saving system.

Active+ is an out-of-the-box standalone solution consisting of an LED driver and small sensor built into the luminaire. Luminaires fitted with Active+ solution are ideal for refurbishment projects, as well as for new offices, corridors, open plan areas, etc.

**Materials:** Steel sheet body, electrostatically painted (standard color: grey), microprismatic (MPRM) or OPAL diffuser.

**Installation:** Surface mounted, wall mounted, suspended

**Accessories:** Simple and electric suspension

**Power:** 230V

### ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes

### MECHANICAL DATA

Type of installation	Universal
Housing material	Steel sheet

### INFORMATION

Colour	Grey
Operating temperature range	-15 ... 40 °C

### CERTIFICATES

Degree of protection (IP)	IP44
Class of protection	I
Light source protection	Yes
CE	Yes
PZH	Yes
HACCP+	Yes
EAC	Yes

### LIGHT DATA

Light colour	White
Color rendering index	84
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L80
Lifetime	> 72000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	85 %

### OPTICAL DATA

Diffuser colour	Transparent
-----------------	-------------






**AVAILABE VARIANTS**

Product code	Luminaire power [W]	Louver/shutter	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Weight [kg]
CV001.2222.830.A000 PX0906339	10	MPRM	990	99	3000K	3.40
CV001.2222.840.A000 PX0906346	10	MPRM	1010	101	4000K	3.40
CV003.2222.830.A000 PX0906353	19	MPRM	2030	107	3000K	3.80
CV003.2222.840.A000 PX0906360	19	MPRM	2070	109	4000K	3.80
CV002.2222.830.A000 PX0906843	19	MPRM	1950	103	3000K	2.00
CV002.2222.840.A000 PX0906850	19	MPRM	2010	106	4000K	2.00
CV002.2211.830.A000 PX0906829	19	OPAL	1660	87	3000K	2.00
CV002.2211.840.A000 PX0906836	19	OPAL	1710	90	4000K	2.00
CV004.2211.830.A000 PX0906601	32	OPAL	2890	90	3000K	3.40
CV004.2211.840.A000 PX0906608	32	OPAL	2950	92	4000K	3.40
CV005.2211.830.A000 PX0906615	38	OPAL	3430	90	3000K	3.60
CV005.2211.840.A000 PX0906622	38	OPAL	3500	92	4000K	3.60
CV006.2211.830.A000 PX0906629	39	OPAL	4120	105	3000K	6.50
CV006.2211.840.A000 PX0906636	39	OPAL	4200	107	4000K	6.50
CV007.2211.830.A000 PX0906643	67	OPAL	6860	102	3000K	6.50
CV007.2211.840.A000 PX0906650	67	OPAL	7000	104	4000K	6.50
CV008.2211.830.A000 PX0906657	44	OPAL	4120	93	3000K	7.00
CV008.2211.840.A000 PX0906664	44	OPAL	4200	95	4000K	7.00
CV009.2211.830.A000 PX0906671	71	OPAL	6860	96	3000K	7.00
CV009.2211.840.A000 PX0906678	71	OPAL	7000	98	4000K	7.00
CV004.2222.830.A000 PX0906685	32	MPRM	3400	106	3000K	3.40
CV004.2222.840.A000 PX0906692	32	MPRM	3460	108	4000K	3.40
CV005.2222.830.A000 PX0906699	38	MPRM	4020	106	3000K	3.60
CV005.2222.840.A000 PX0906706	38	MPRM	4100	108	4000K	3.60
CV006.2222.830.A000 PX0906713	39	MPRM	4830	124	3000K	6.50
CV006.2222.840.A000 PX0906720	39	MPRM	4920	126	4000K	6.50
CV007.2222.830.A000 PX0906727	67	MPRM	8040	120	3000K	6.50
CV007.2222.840.A000 PX0906734	67	MPRM	8200	122	4000K	6.50

## AVAILABLE VARIANTS

Product code	Luminaire power [W]	Louver/shutter	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Weight [kg]
CV008.2222.830.A000 PX0906741	44	MPRM	4830	110	3000K	7.00
CV008.2222.840.A000 PX0906748	44	MPRM	4920	112	4000K	7.00
CV009.2222.830.A000 PX0906755	71	MPRM	8040	113	3000K	7.00
CV009.2222.840.A000 PX0906762	71	MPRM	8200	115	4000K	7.00

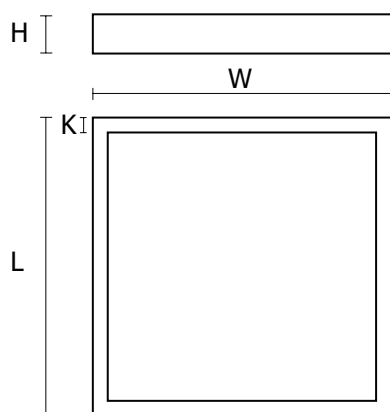

## DIMENSIONS

L [mm]	W [mm]	H [mm]	K [mm]	MPRM	OPAL
307	307	62	44	CV001.2222.830.A000 PX0906339	
				CV001.2222.840.A000 PX0906346	
407	407	62	54	CV003.2222.830.A000 PX0906353	
				CV003.2222.840.A000 PX0906360	
307	307	65	25	CV002.2222.830.A000 PX0906843	CV002.2211.830.A000 PX0906829
				CV002.2222.840.A000 PX0906850	CV002.2211.840.A000 PX0906836
407	407	65	25	CV004.2222.830.A000 PX0906685	CV004.2211.830.A000 PX0906601
				CV004.2222.840.A000 PX0906692	CV004.2211.840.A000 PX0906608
295	595	65	25	CV005.2222.830.A000 PX0906699	CV005.2211.830.A000 PX0906615
				CV005.2222.840.A000 PX0906706	CV005.2211.840.A000 PX0906622
595	595	65	25	CV006.2222.830.A000 PX0906713	CV006.2211.830.A000 PX0906629
				CV006.2222.840.A000 PX0906720	CV006.2211.840.A000 PX0906636
				CV007.2222.830.A000 PX0906727	CV007.2211.830.A000 PX0906643
				CV007.2222.840.A000 PX0906734	CV007.2211.840.A000 PX0906650
295	1195	65	25	CV008.2222.830.A000 PX0906741	CV008.2211.830.A000 PX0906657
				CV008.2222.840.A000 PX0906748	CV008.2211.840.A000 PX0906664
				CV009.2222.830.A000 PX0906755	CV009.2211.830.A000 PX0906671
				CV009.2222.840.A000 PX0906762	CV009.2211.840.A000 PX0906678

L = Length | W = Width | H = Height / Depth | K = Additional dimension



---

## ACCESSORIES

### Electric element

---



Electrical suspension  
Pieces in set: 1

PX0922021

Grey

---

PX0922032

White

---

### Installation element

---



Simple suspension  
Pieces in set: 1

PX0922143

---