

NEW MATCH



Match 96LED 240w



Match 192LED 480w

Modular LED floodlight with high performance, designed for large areas illumination, suitable for industrial facilities, stadiums and sport centers. With a remarkable high efficiency system and multiple optic options that allow versatility of its application.

Housing and frame: die-cast aluminum.

Paintwork: thermosetting polyester powder, prior degreasing and phosphochromatizing process that will ensure an extremely high resistance to chemical and atmospheric agents.

LED: Samsung LH351C, CRI>70, CCT 4000K.

Expected lifetime: 100.000h L80 B10 @ta25, 60.000h L80 B20 @ta50.

Goniometer: one-side for a precise, simply and quickly pointing.

Power supply: 100-305V 50/60Hz with electronic ballast, 6/10Kv surge protection, inrush current (cold start) 85A for single module, over-temperature protection, over-charging protection, short-circuit protection, low ripple, dimm 1-10V supplied as standard.

Bracket: 4 mm slotted and thick shaped steel. 120° Product adjustment. 120° Single-module adjustment.

Available versions:

- AS: shockproof cluster in PMMA anti UV UL94, asymmetrical lens with vertex at 55°;
- 15: shockproof cluster in PMMA anti UV UL94, curved rotosymmetrical optic and beam 15°;
- 24: shockproof cluster in PMMA anti UV UL94, curved rotosymmetrical optic and beam 24°;
- 40: shockproof cluster in PMMA anti UV UL94, curved rotosymmetrical optic and beam 40°.


Available on request:

- extra clear tempered glass 4mm (IK10)*;
- 0-10V, PWM, DMX, DALI and output reduction with Vmidnight system;
- CRI80 or 90, CCT 3000/5000K;
- visor;
- customized LEDs current driving;
- driver for 380/415V;
- external SPD 10-15Kv;
- GORE® Protective Vents system.

OPZIONI DI INSTALLAZIONE / INSTALLATION OPTIONS



Match 96LED 240w Retro



COLORI DISPONIBILI / AVAILABLE COLORS
Antracite RAL 7039 / RAL 7039 Anthracite



Match 288LED 720w



Match 384LED 960w




Match 384LED 960w retro

CODICE Code	CABLAGGIO Wiring	POTENZA Power(W)	FLUSSO NOMINALE Typical flux(lm)	FLUSSO NETTO Net output(lm)	CORRENTE Current(lmA)	SPD Spd(Kv)	Apertura Fascio Beam angle(°)	PESO NETTO Net weight(Kg)
250643.096	96 LED LH351C	240W	36950	34696	850	6/10	AS55	9,00
250643.192	192 LED LH351C	480W	73900	69392	850	6/10	AS55	18,00
250643.288	288 LED LH351C	720W	110850	104088	850	6/10	AS55	35,00
250643.384	384 LED LH351C	960W	147800	138784	850	6/10	AS55	44,00
251643.096	96 LED LH351C	240W	36950	34511	850	6/10	15	9,00
251643.192	192 LED LH351C	480W	73900	69022,5	850	6/10	15	18,00
251643.288	288 LED LH351C	720W	110850	103534	850	6/10	15	35,00
251643.384	384 LED LH351C	960W	147800	138045	850	6/10	15	44,00
252643.096	96 LED LH351C	240W	36950	34511	850	6/10	24	9,00
252643.192	192 LED LH351C	480W	73900	69022,5	850	6/10	24	18,00
252643.288	288 LED LH351C	720W	110850	103534	850	6/10	24	35,00
252643.384	384 LED LH351C	960W	147800	138045	850	6/10	24	44,00
253643.096	96 LED LH351C	240W	36950	32996	850	6/10	40	9,00
253643.192	192 LED LH351C	480W	73900	65992,5	850	6/10	40	18,00
253643.288	288 LED LH351C	720W	110850	98989	850	6/10	40	35,00
253643.384	384 LED LH351C	960W	147800	131985	850	6/10	40	44,00


code + DALI Driver dimmerabile DALI | DALI dimmable driver

code + DIMM Driver dimmerabile Vmidnight | Vmidnight dimmable driver


code + SPD SPD esterno 10-15Kv | external SPD 10-15Kv




Match 15° 480W 73900lm



Match 24° 240W 36950lm



Match 40° 720W 110850lm



Match AS 960W 147800lm

MADE IN ITALY

IP66

IK05

IK10*

CE

ta 35/50

1-10V

DMX



DALI

3 YEARS WARRANTY

PROIETTORI PER ESTERNO
OUTDOOR FLOODLIGHTS


NEW MATCH

Side View
0,016
m²


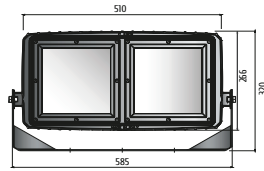


Match 96LED 240W
[mm]

Frontal View
0,135
m²




Side View
0,045
m²


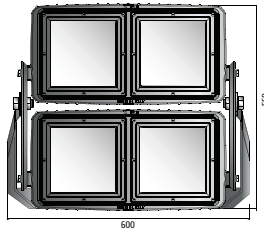


Match 192LED 480W
[mm]

Frontal View
0,290
m²




Side View
0,058
m²

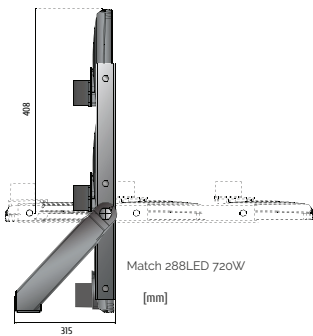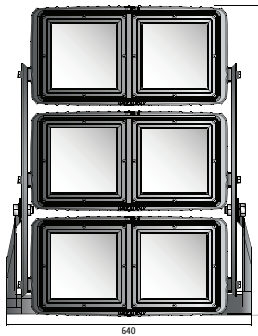


Match 288LED 720W
[mm]

Frontal View
0,470
m²


Side View
0,087
m²

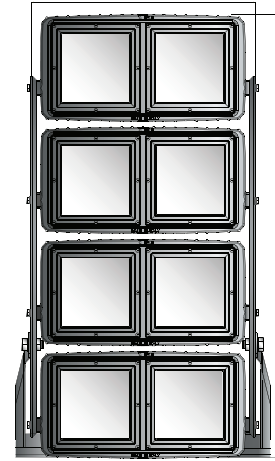

Frontal View
0,610
m²

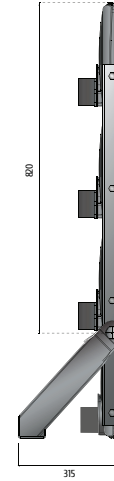

Match 384LED 960W
[mm]

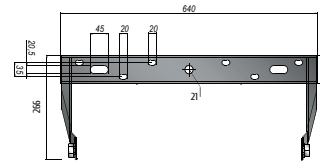

Sistema di rotazione / Rotating system

