



Photography: BIS Images



EXTENDED FAMILY

- BLACK FOSTER SURFACE
- BLACK FOSTER SUSPENSION
- BLACK FOSTER CUSTOM

BLACK FOSTER





			P	CCT	I	Flux	LOR
BLACK FOSTER Recessed 1	NO DIM	A319-10-10- N	2,1W	2700K	700mA	190Lm	90%
		A319-10-11- N	2,1W	3000K	700mA	210Lm	90%
	A319-10-12- N	2,1W	4000K	700mA	250Lm	90%	
	DALI	A319-10-40- N	2,1W	2700K	700mA	190Lm	90%
		A319-10-41- N	2,1W	3000K	700mA	210Lm	90%
A319-10-42- N		2,1W	4000K	700mA	250Lm	90%	



			P	CCT	I	Flux	LOR
BLACK FOSTER Recessed 2		A319-20- 0-0- N	4,2W	2700K	700mA	380Lm	90%
		A319-20- 0-1- N	4,2W	3000K	700mA	420Lm	90%
		A319-20- 0-2- N	4,2W	4000K	700mA	500Lm	90%




			P	CCT	I	Flux	LOR
BLACK FOSTER Recessed 3		A319-30- 0-0- N	6,3W	2700K	700mA	570Lm	90%
		A319-30- 0-1- N	6,3W	3000K	700mA	630Lm	90%
		A319-30- 0-2- N	6,3W	4000K	700mA	750Lm	90%



			P	CCT	I	Flux	LOR
BLACK FOSTER Recessed 5		A319-40- 0-0- N	10,5W	2700K	700mA	950Lm	90%
		A319-40- 0-1- N	10,5W	3000K	700mA	1050Lm	90%
		A319-40- 0-2- N	10,5W	4000K	700mA	1250Lm	90%



⓪	*OPTIONS
1	No DIM
2	DIM Push
3	DIM 1-10V
4	DIM DALI

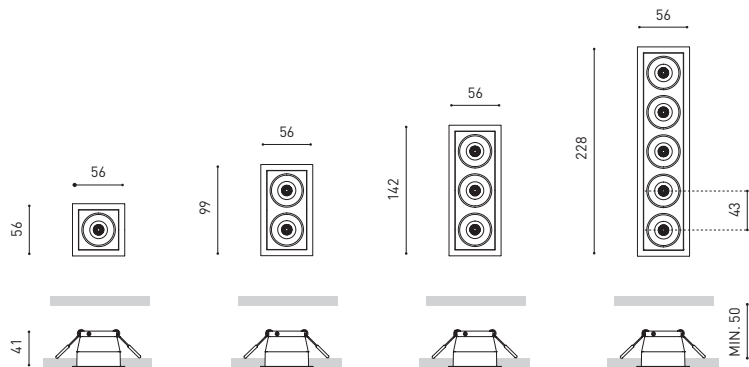

COLOUR | N ■ RAL 9005 | MATERIAL | PC | AL | ABS+PC





			P	CCT	I	Flux	LOR
BLACK FOSTER Trimless 1	NO DIM	A318-10-10- N	2,1W	2700K	700mA	190Lm	90%
		A318-10-11- N	2,1W	3000K	700mA	210Lm	90%
		A318-10-12- N	2,1W	4000K	700mA	250Lm	90%
	DALI	A318-10-40- N	2,1W	2700K	700mA	190Lm	90%
		A318-10-41- N	2,1W	3000K	700mA	210Lm	90%
		A318-10-42- N	2,1W	4000K	700mA	250Lm	90%



			P	CCT	I	Flux	LOR
BLACK FOSTER Trimless 2		A318-20- ① -0- N	4,2W	2700K	700mA	380Lm	90%
		A318-20- ① -1- N	4,2W	3000K	700mA	420Lm	90%
		A318-20- ① -2- N	4,2W	4000K	700mA	500Lm	90%



			P	CCT	I	Flux	LOR
BLACK FOSTER Trimless 3		A318-30- ① -0- N	6,3W	2700K	700mA	570Lm	90%
		A318-30- ① -1- N	6,3W	3000K	700mA	630Lm	90%
		A318-30- ① -2- N	6,3W	4000K	700mA	750Lm	90%



			P	CCT	I	Flux	LOR
BLACK FOSTER Trimless 5		A318-40- ① -0- N	10,5W	2700K	700mA	950Lm	90%
		A318-40- ① -1- N	10,5W	3000K	700mA	1050Lm	90%
		A318-40- ① -2- N	10,5W	4000K	700mA	1250Lm	90%



① *OPTIONS

1	No DIM
2	DIM Push
3	DIM 1-10V
4	DIM DALI

COLOUR | N ■ RAL 9005 | MATERIAL | AL | ABS+PC |

» 368

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

» PLEASE CONSULT



		P	CCT	I	Flux	LOR
BLACK FOSTER Trimless 10	A318-50- Ⓞ -0- N 	21W	2700K	700mA	1900Lm	90%
	A318-50- Ⓞ -1- N 	21W	3000K	700mA	2100Lm	90%
	A318-50- Ⓞ -2- N 	21W	4000K	700mA	2500Lm	90%




		P	CCT	I	Flux	LOR
BLACK FOSTER Trimless 15	A318-60- Ⓞ -0- N 	31,5W	2700K	700mA	2850Lm	90%
	A318-60- Ⓞ -1- N 	31,5W	3000K	700mA	3150Lm	90%
	A318-60- Ⓞ -2- N 	31,5W	4000K	700mA	3750Lm	90%



Ⓞ *OPTIONS

1	No DIM
2	DIM Push
3	DIM 1-10V
4	DIM DALI

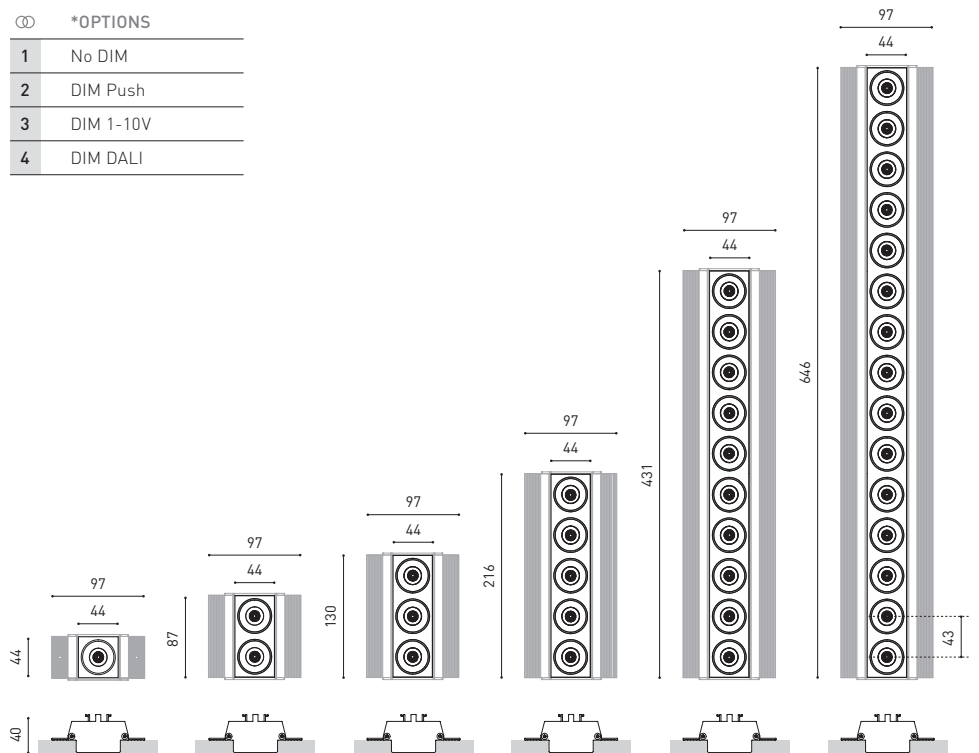

COLOUR | N ■ RAL 9005 | MATERIAL | AL | ABS+PC |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

