



Bari Q LED



Modern and universal downlight luminaire of high lighting performance, based on LED module. Application: offices, hotels, restaurants, halls, shopping malls.

For suspended Bari Q LED with central electrical suspension 3x you need to use surface housing IP44.

Tolerance of luminance power and luminous flux: +/-10%

Materials: Powder painted, white aluminium body, OPAL diffuser.

Installation: Into plaster cardboard and modular ceilings.

Accessories: housing for surface mounting IP20, housing for surface mounting IP44, central electrical suspension 3x

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes

INFORMATION

Colour	White
--------	-------

CERTIFICATES

Degree of protection (IP)	IP44
Degree of protection (IP) / top/	IP20
Class of protection	II
Light source protection	Yes
CE	Yes
PZH	Yes
HACCP+	Yes

LIGHT DATA

Light colour	White
Light distribution	DI
Light output degradation	B10
Lumen maintenance	L70
Lifetime	> 50000 h


OPTICAL DATA

Louver/ shutter	OPAL
Diffuser colour	White
Diffuser material	Opal/mat plastic

AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Info
EU001.1111.830.A000	11	1480	135	3000K	155mm
EU001.1111.840.A000	11	1510	137	4000K	155mm
EU002.1111.830.A000	16	2040	128	3000K	155mm
EU002.1111.840.A000	16	2090	131	4000K	155mm
EU003.1111.830.A000	17	2410	142	3000K	225mm
EU003.1111.840.A000	17	2460	145	4000K	225mm
EU004.1111.830.A000	22	2950	134	3000K	225mm
EU004.1111.840.A000	22	3020	137	4000K	225mm
EU005.1111.830.A000	26	3510	135	3000K	225mm
EU005.1111.840.A000	26	3590	138	4000K	225mm

DIMENSIONS

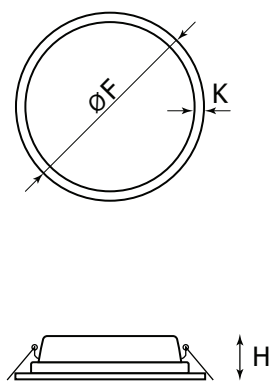

Product code	H [mm]	F [mm]	K [mm]	J [mm]
EU001.1111.830.A000	40	155	15	13
EU001.1111.840.A000	40	155	15	13
EU002.1111.830.A000	40	155	15	13
EU002.1111.840.A000	40	155	15	13
EU003.1111.830.A000	40	225	15	15
EU003.1111.840.A000	40	225	15	15
EU004.1111.830.A000	40	225	15	15
EU004.1111.840.A000	40	225	15	15
EU005.1111.830.A000	40	225	15	15
EU005.1111.840.A000	40	225	15	15

H = Height / Depth | F = Outer diameter | K = Additional dimension | J = Additional dimension

ACCESSORIES

Electric element



Bari Q LED central suspension 3x
Pieces in set: 1

FS032.11.1500.A	1500mm	White
FS032.11.1500.D	1500mm DALI	White
FS032.22.1500.A	1500mm	Grey
FS032.22.1500.D	1500mm DALI	Grey
FS032.33.1500.A	1500mm	Black
FS032.33.1500.D	1500mm DALI	Black

Structural element



BARI Q LED Surface mounting housing IP20
Pieces in set: 1

FL030.11.0155	ØF=155mm; H=75mm	White
FL030.11.0225	ØF=225mm; H=79mm	White



BARI Q LED Surface mounting housing IP44
Pieces in set: 1

FL043.11.0160	ØF=160mm; H=75mm	White
FL043.22.0160	ØF=160mm; H=75mm	Grey
FL043.33.0160	ØF=160mm; H=75mm	Black
FL043.11.0228	ØF=228mm; H=75mm	White
FL043.22.0228	ØF=228mm; H=75mm	Grey
FL043.33.0228	ØF=228mm; H=75mm	Black

BARI Q LED 225mm




BARI Q LED 155mm




BARI Q LED 155mm



BARI Q LED 155mm - OPAL diffuser

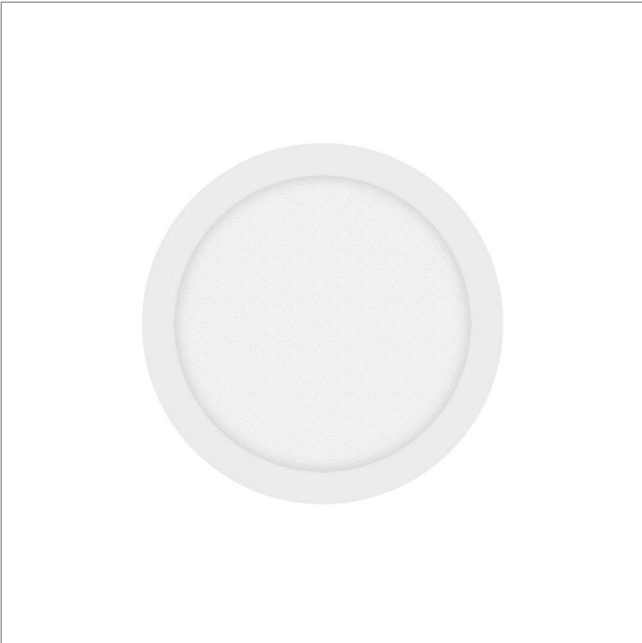

BARI Q LED 225mm - OPAL diffuser

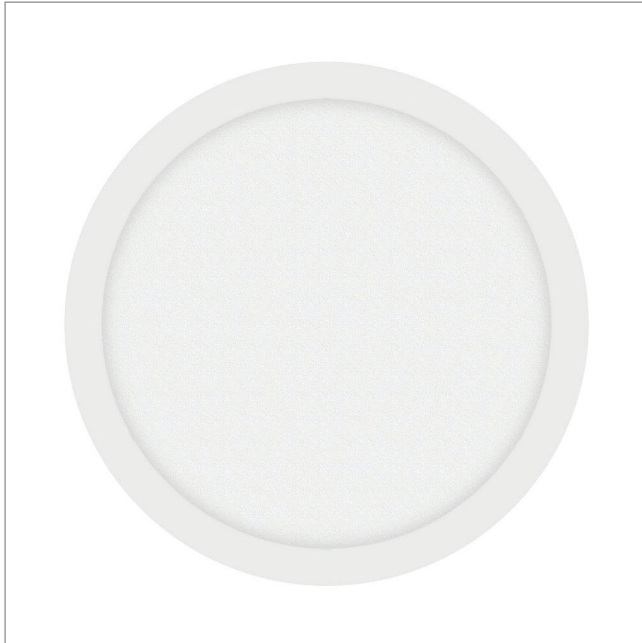

BARI Q NT LED 225mm



BARI Q LED - ceiling cross section



BARI Q LED



BARI Q LED recessed



BARI Q NT LED



