



SIX 48V

EXTENDED FAMILY

SIX RECESSED_154

SIX_210





					P	CCT	Beam	I	Flux	LOR
SIX L 48V	A329-0-	⊗ -10-	WT NT		24,5W	2700K	17°	700mA	2850Lm	93%
	A329-0-	⊗ -11-	WT NT		24,5W	3000K	17°	700mA	2950Lm	93%
	A329-0-	⊗ -12-	WT NT		24,5W	4000K	17°	700mA	3000Lm	93%
	A329-0-	⊗ -30-	WT NT		24,5W	2700K	26°	700mA	2850Lm	93%
	A329-0-	⊗ -31-	WT NT		24,5W	3000K	26°	700mA	2950Lm	93%
	A329-0-	⊗ -32-	WT NT		24,5W	4000K	26°	700mA	3000Lm	93%
	A329-0-	⊗ -20-	WT NT		24,5W	2700K	34°	700mA	2850Lm	90%
	A329-0-	⊗ -21-	WT NT		24,5W	3000K	34°	700mA	2950Lm	90%
	A329-0-	⊗ -22-	WT NT		24,5W	4000K	34°	700mA	3000Lm	90%

LED | 48 V | CE | III | IP20 | CRI>90 | L80B10 > 60.000h



					P	CCT	Beam	I	Flux	LOR
SIX M 48V	A330-0-	⊗ -10-	WT NT		17W	2700K	19°	500mA	2050Lm	93%
	A330-0-	⊗ -11-	WT NT		17W	3000K	19°	500mA	2130Lm	93%
	A330-0-	⊗ -12-	WT NT		17W	4000K	19°	500mA	2160Lm	93%
	A330-0-	⊗ -20-	WT NT		17W	2700K	28°	500mA	2050Lm	91%
	A330-0-	⊗ -21-	WT NT		17W	3000K	28°	500mA	2130Lm	91%
	A330-0-	⊗ -22-	WT NT		17W	4000K	28°	500mA	2160Lm	91%
	A330-0-	⊗ -30-	WT NT		17W	2700K	38°	500mA	2050Lm	93%
	A330-0-	⊗ -31-	WT NT		17W	3000K	38°	500mA	2130Lm	93%
	A330-0-	⊗ -32-	WT NT		17W	4000K	38°	500mA	2160Lm	93%

LED | 48 V | CE | III | IP20 | CRI>90 | L80B10 > 60.000h



⊗ *OPTIONS

1	No DIM
2	DIM DALI

ACCESSORIES

SIX L High Chromatic LED**


SIX M High Chromatic LED**

NOT SOLD SEPARATELY




i » 366

SIX L 48V



SIX M 48V

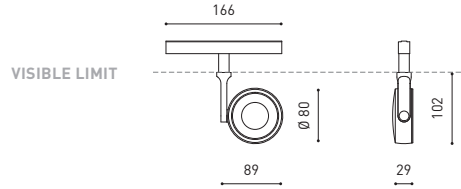

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL | AL | PC |

TRACK 48V i » 198

** ACCESSORY & COLOURS AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT



		P	CCT	Beam	I	Flux	LOR
SIX S 48V	A333-0- Ⓞ -10- WT NT	8,5W	2700K	17°	500mA	1030Lm	86%
	A333-0- Ⓞ -11- WT NT	8,5W	3000K	17°	500mA	1070Lm	86%
	A333-0- Ⓞ -12- WT NT	8,5W	4000K	17°	500mA	1100Lm	86%
	A333-0- Ⓞ -20- WT NT	8,5W	2700K	24°	500mA	1030Lm	84%
	A333-0- Ⓞ -21- WT NT	8,5W	3000K	24°	500mA	1070Lm	84%
	A333-0- Ⓞ -22- WT NT	8,5W	4000K	24°	500mA	1100Lm	84%
	A333-0- Ⓞ -30- WT NT	8,5W	2700K	34°	500mA	1030Lm	89%
	A333-0- Ⓞ -31- WT NT	8,5W	3000K	34°	500mA	1070Lm	89%
	A333-0- Ⓞ -32- WT NT	8,5W	4000K	34°	500mA	1100Lm	89%

LED | 48 V | CE | III | IP20 | CRI>90 | L80B10 > 60.000h



Ⓞ *OPTIONS

1	No DIM
2	DIM DALI


ACCESSORY

SIX S High Chromatic LED**

NOT SOLD SEPARATELY

LED ⓘ » 366

SIX S 48V

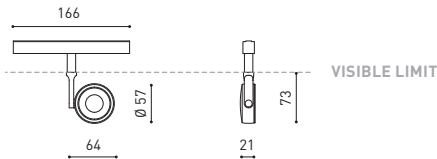

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL | AL | PC |

TRACK 48V ⓘ » 198

** ACCESSORY & COLOURS AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT



		P	CCT	Beam	I	Flux	LOR
SIX XS 48V	A335-0- Ⓞ -10- WT NT	4,5W	2700K	17°	500mA	470Lm	90%
	A335-0- Ⓞ -11- WT NT	4,5W	3000K	17°	500mA	500Lm	90%
	A335-0- Ⓞ -12- WT NT	4,5W	4000K	17°	500mA	530Lm	90%
	A335-0- Ⓞ -20- WT NT	4,5W	2700K	23°	500mA	470Lm	86%
	A335-0- Ⓞ -21- WT NT	4,5W	3000K	23°	500mA	500Lm	86%
	A335-0- Ⓞ -22- WT NT	4,5W	4000K	23°	500mA	530Lm	86%
	A335-0- Ⓞ -30- WT NT	4,5W	2700K	34°	500mA	470Lm	88%
	A335-0- Ⓞ -31- WT NT	4,5W	3000K	34°	500mA	500Lm	88%
	A335-0- Ⓞ -32- WT NT	4,5W	4000K	34°	500mA	530Lm	88%

LED | 48 V | CE | III | IP20 | CRI>90 | L80B10 > 60.000h



		P	CCT	Beam	I	Flux	LOR
SIX XS 48V Double	A335-1- Ⓞ -10- WT NT	9W	2700K	17°	500mA	2 X 470Lm	90%
	A335-1- Ⓞ -11- WT NT	9W	3000K	17°	500mA	2 X 500Lm	90%
	A335-1- Ⓞ -12- WT NT	9W	4000K	17°	500mA	2 X 530Lm	90%
	A335-1- Ⓞ -20- WT NT	9W	2700K	23°	500mA	2 X 470Lm	86%
	A335-1- Ⓞ -21- WT NT	9W	3000K	23°	500mA	2 X 500Lm	86%
	A335-1- Ⓞ -22- WT NT	9W	4000K	23°	500mA	2 X 530Lm	86%
	A335-1- Ⓞ -30- WT NT	9W	2700K	34°	500mA	2 X 470Lm	88%
	A335-1- Ⓞ -31- WT NT	9W	3000K	34°	500mA	2 X 500Lm	88%
	A335-1- Ⓞ -32- WT NT	9W	4000K	34°	500mA	2 X 530Lm	88%

LED | 48 V | CE | III | IP20 | CRI>90 | L80B10 > 60.000h



Ⓞ *OPTIONS

1	No DIM
2	DIM DALI

ACCESSORY


SIX XS High Chromatic LED**

NOT SOLD SEPARATELY




i » 366

SIX XS 48V



SIX XS 48V DOUBLE

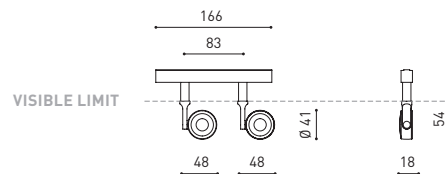

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL | AL | PC |

TRACK 48V i » 198

** ACCESSORY & COLOURS AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT