



Kekomo, Eida (Spain) | Design: Pablo Muñoz Payá Arquitectos | Photography: Jesús Granada - Fotografía de Arquitectura

FIT 48V

EXTENDED FAMILY

FIT RECESSED_160

FIT_214





		P	CCT	Beam	I	Flux	LOR
FIT Ø50 48V	A346-0- ① -10- WT NT	12W	2700K	15°	1050mA	1040Lm	85%
	A346-0- ① -11- WT NT	12W	3000K	15°	1050mA	1120Lm	85%
	A346-0- ① -20- WT NT	12W	2700K	28°	1050mA	1040Lm	82%
	A346-0- ① -21- WT NT	12W	3000K	28°	1050mA	1120Lm	82%
	A346-0- ① -30- WT NT	12W	2700K	47°	1050mA	1040Lm	80%
	A346-0- ① -31- WT NT	12W	3000K	47°	1050mA	1120Lm	80%

48 V | IP20 | CRI>90 | L80B10 > 60.000h


① *OPTIONS

1	No DIM
2	DIM DALI

ACCESSORY

FIT Ø50 Anti-glare Honeycomb Louver ** A346-00-00

NOT SOLD SEPARATELY

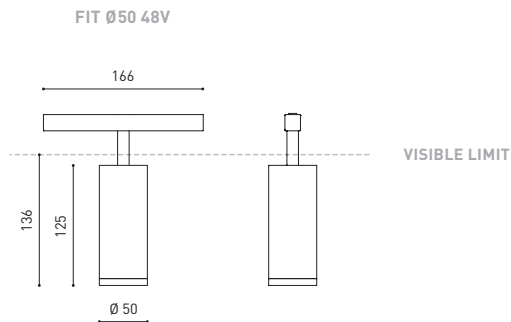

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL | AL | PC |

TRACK 48V » 198

** ACCESSORY AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT



		P	CCT	Beam	I	Flux	LOR
FIT Ø35 48V	A345-0- Ⓞ -10- WT NT	5,5W	2700K	19°	500mA	590Lm	82%
	A345-0- Ⓞ -11- WT NT	5,5W	3000K	19°	500mA	630Lm	82%
	A345-0- Ⓞ -20- WT NT	5,5W	2700K	29°	500mA	590Lm	80%
	A345-0- Ⓞ -21- WT NT	5,5W	3000K	29°	500mA	630Lm	80%
	A345-0- Ⓞ -30- WT NT	5,5W	2700K	38°	500mA	590Lm	80%
	A345-0- Ⓞ -31- WT NT	5,5W	3000K	38°	500mA	630Lm	80%

LED | 48 V | CE | III IP20 | CRI>90 | L80B10 > 60.000h |
 MacAdam Step 2 | OPTIONS* | INCL | TRACK 48V | 360° | 90° | 19°/29°/38°



		P	CCT	Beam	I	Flux	LOR
FIT Ø35 48V Double	A345-1- Ⓞ -10- WT NT	11W	2700K	19°	500mA	2 x 590Lm	82%
	A345-1- Ⓞ -11- WT NT	11W	3000K	19°	500mA	2 x 630Lm	82%
	A345-1- Ⓞ -20- WT NT	11W	2700K	29°	500mA	2 x 590Lm	80%
	A345-1- Ⓞ -21- WT NT	11W	3000K	29°	500mA	2 x 630Lm	80%
	A345-1- Ⓞ -30- WT NT	11W	2700K	38°	500mA	2 x 590Lm	80%
	A345-1- Ⓞ -31- WT NT	11W	3000K	38°	500mA	2 x 630Lm	80%

LED | 48 V | CE | III IP20 | CRI>90 | L80B10 > 60.000h |
 MacAdam Step 2 | OPTIONS* | INCL | TRACK 48V | 360° | 90° | 19°/29°/38°


Ⓞ *OPTIONS

1	No DIM
2	DIM DALI

ACCESSORY

FIT Ø35 Anti-glare Honeycomb Louver ** A345-00-00

NOT SOLD SEPARATELY

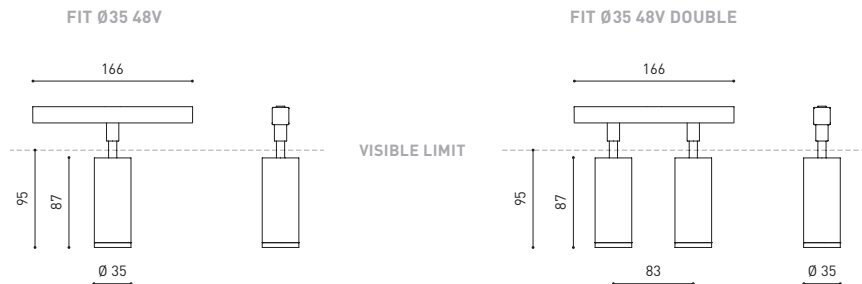

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL | AL | PC |

TRACK 48V ⓘ » 198

** ACCESSORY AFFECTS THE LIGHTING PARAMETERS

ⓘ » PLEASE CONSULT



		P	CCT	Beam	I	Flux	LOR
FIT Ø20 48V	A344-0- Ⓞ -10- WT NT	2,1W	2700K	12°	700mA	127Lm	87%
	A344-0- Ⓞ -11- WT NT	2,1W	3000K	12°	700mA	150Lm	87%
	A344-0- Ⓞ -20- WT NT	2,1W	2700K	30°	700mA	127Lm	88%
	A344-0- Ⓞ -21- WT NT	2,1W	3000K	30°	700mA	150Lm	88%
	A344-0- Ⓞ -30- WT NT	2,1W	2700K	54°	700mA	127Lm	81%
	A344-0- Ⓞ -31- WT NT	2,1W	3000K	54°	700mA	150Lm	81%




		P	CCT	Beam	I	Flux	LOR
FIT Ø20 48V Double	A344-1- Ⓞ -10- WT NT	4,2W	2700K	12°	700mA	2 x 127Lm	87%
	A344-1- Ⓞ -11- WT NT	4,2W	3000K	12°	700mA	2 x 150Lm	87%
	A344-1- Ⓞ -20- WT NT	4,2W	2700K	30°	700mA	2 x 127Lm	88%
	A344-1- Ⓞ -21- WT NT	4,2W	3000K	30°	700mA	2 x 150Lm	88%
	A344-1- Ⓞ -30- WT NT	4,2W	2700K	54°	700mA	2 x 127Lm	81%
	A344-1- Ⓞ -31- WT NT	4,2W	3000K	54°	700mA	2 x 150Lm	81%



Ⓞ *OPTIONS

1	No DIM
2	DIM DALI

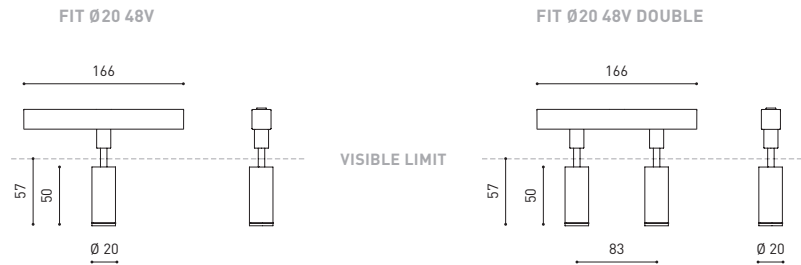

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 | MATERIAL | AL | PC | TRACK 48V ⓘ » 198

⚡ » PLEASE CONSULT