



Torino AS LED



Independently installed luminaire of asymmetric light distribution designed for LEDs. Torino AS LED is a great solution for illuminating shop shelves, blackboards and any surfaces requiring additional lighting.

Materials: Housing made of electrostatically painted steel sheets (white color), asymmetric reflector of polished and anodized aluminum.

Installation: Ceiling mounted

Power: 230 V

ELECTRICAL DATA

Light source	LED
LED modules	1x
Number of light sources	1
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes
Power factor	0.95
SELV	No

MECHANICAL DATA

Type of installation	Surface mounted
Housing material	Steel sheet

INFORMATION

Colour	White
Operating temperature range	-20 ... 35 °C

CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
CE	Yes
PZH	Yes
HACCP+	Yes
EAC	Yes

LIGHT DATA

Light colour	White
Color rendering index	84
Light distribution	Mid beam
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L80
Lifetime	> 72000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	85 %

OPTICAL DATA


Reflector	Mat
-----------	-----



AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Weight [kg]
CP001.1167.830.A000 PX4087201	17	1580	92	3000K	1.80
CP001.1167.840.A000 PX4087208	17	1600	94	4000K	1.80
CP002.1167.830.A000 PX4087215	32	3280	102	3000K	3.40
CP002.1167.840.A000 PX4087222	32	3350	104	4000K	3.40

DIMENSIONS

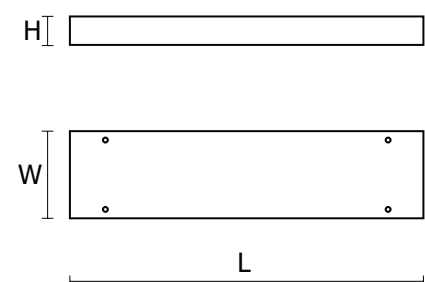

Product code	L [mm]	W [mm]	H [mm]
CP001.1167.830.A000 PX4087201	610	172	80
CP001.1167.840.A000 PX4087208	610	172	80
CP002.1167.830.A000 PX4087215	1170	172	80
CP002.1167.840.A000 PX4087222	1170	172	80

L = Length | W = Width | H = Height / Depth

MOUNTING HOLES

Product code	A [mm]	B
CP001.1167.830.A000 PX4087201	480	79
CP001.1167.840.A000 PX4087208	480	79
CP002.1167.830.A000 PX4087215	950	79
CP002.1167.840.A000 PX4087222	950	79

A = Spacing length | B = Spacing width