

Bang & Olufsen Shop, Valencia (Spain) | Design: Alfredo Monzó | Photography: Héctor Rubio - Images Positive



EXTENDED FAMILY

SIX 48V_168

SIX_21th

SIX RECESSED





| | | | | P | CCT | Beam | I | Flux | LOR |
|-------------------------|----------------|---------|--|-------|-------|------|-------|--------|-----|
| SIX L Recessed 1 | A287-11-10- | WT NT | | 11,5W | 2700K | 17° | 350mA | 1600Lm | 93% |
| | A287-11-11- | WT NT | | 11,5W | 3000K | 17° | 350mA | 1650Lm | 93% |
| | A287-11-12- | WT NT | | 11,5W | 4000K | 17° | 350mA | 1700Lm | 93% |
| | A287-11-30- | WT NT | | 11,5W | 2700K | 26° | 350mA | 1600Lm | 93% |
| | A287-11-31- | WT NT | | 11,5W | 3000K | 26° | 350mA | 1650Lm | 93% |
| | A287-11-32- | WT NT | | 11,5W | 4000K | 26° | 350mA | 1700Lm | 93% |
| | A287-11-20- | WT NT | | 11,5W | 2700K | 34° | 350mA | 1600Lm | 90% |
| | A287-11-21- | WT NT | | 11,5W | 3000K | 34° | 350mA | 1650Lm | 90% |
| | A287-11-22- | WT NT | | 11,5W | 4000K | 34° | 350mA | 1700Lm | 90% |
| SIX L Recessed 2 | A287-2- Ⓞ -10- | WT NT | | 24,5W | 2700K | 17° | 700mA | 2850Lm | 93% |
| | A287-2- Ⓞ -11- | WT NT | | 24,5W | 3000K | 17° | 700mA | 2950Lm | 93% |
| | A287-2- Ⓞ -12- | WT NT | | 24,5W | 4000K | 17° | 700mA | 3000Lm | 93% |
| | A287-2- Ⓞ -30- | WT NT | | 24,5W | 2700K | 26° | 700mA | 2850Lm | 93% |
| | A287-2- Ⓞ -31- | WT NT | | 24,5W | 3000K | 26° | 700mA | 2950Lm | 93% |
| | A287-2- Ⓞ -32- | WT NT | | 24,5W | 4000K | 26° | 700mA | 3000Lm | 93% |
| | A287-2- Ⓞ -20- | WT NT | | 24,5W | 2700K | 34° | 700mA | 2850Lm | 90% |
| | A287-2- Ⓞ -21- | WT NT | | 24,5W | 3000K | 34° | 700mA | 2950Lm | 90% |
| | A287-2- Ⓞ -22- | WT NT | | 24,5W | 4000K | 34° | 700mA | 3000Lm | 90% |

LED | 220-240 V~ | 01 CE | IP20 | CRI>90 | L80B10 >60.000h



Ⓞ *OPTIONS

| | |
|---|----------|
| 1 | No DIM |
| 2 | DIM Push |
| 4 | DIM DALI |


ACCESSORY

SIX L High Chromatic LED**

NOT SOLD SEPARATELY



SIX L RECESSED

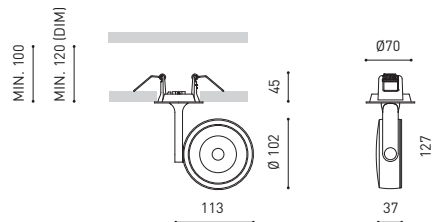

COLOUR | WT RAL 9016 | NT RAL 9005 | MATERIAL | AL | PC |

>> 368

** ACCESSORY & COLOURS AFFECTS THE LIGHTING PARAMETERS

& >> PLEASE CONSULT



| | | | | P | CCT | Beam | I | Flux | LOR |
|-------------------------|----------------|---------|--|-------|-------|------|-------|--------|-----|
| SIX M Recessed 1 | A332-11-10- | WT NT | | 11,5W | 2700K | 19° | 350mA | 1600Lm | 93% |
| | A332-11-11- | WT NT | | 11,5W | 3000K | 19° | 350mA | 1650Lm | 93% |
| | A332-11-12- | WT NT | | 11,5W | 4000K | 19° | 350mA | 1700Lm | 93% |
| | A332-11-20- | WT NT | | 11,5W | 2700K | 28° | 350mA | 1600Lm | 91% |
| | A332-11-21- | WT NT | | 11,5W | 3000K | 28° | 350mA | 1650Lm | 91% |
| | A332-11-22- | WT NT | | 11,5W | 4000K | 28° | 350mA | 1700Lm | 91% |
| | A332-11-30- | WT NT | | 11,5W | 2700K | 38° | 350mA | 1600Lm | 93% |
| | A332-11-31- | WT NT | | 11,5W | 3000K | 38° | 350mA | 1650Lm | 93% |
| | A332-11-32- | WT NT | | 11,5W | 4000K | 38° | 350mA | 1700Lm | 93% |
| SIX M Recessed 2 | A332-2- Ⓞ -10- | WT NT | | 17W | 2700K | 19° | 500mA | 2050Lm | 93% |
| | A332-2- Ⓞ -11- | WT NT | | 17W | 3000K | 19° | 500mA | 2130Lm | 93% |
| | A332-2- Ⓞ -12- | WT NT | | 17W | 4000K | 19° | 500mA | 2160Lm | 93% |
| | A332-2- Ⓞ -20- | WT NT | | 17W | 2700K | 28° | 500mA | 2050Lm | 91% |
| | A332-2- Ⓞ -21- | WT NT | | 17W | 3000K | 28° | 500mA | 2130Lm | 91% |
| | A332-2- Ⓞ -22- | WT NT | | 17W | 4000K | 28° | 500mA | 2160Lm | 91% |
| | A332-2- Ⓞ -30- | WT NT | | 17W | 2700K | 38° | 500mA | 2050Lm | 93% |
| | A332-2- Ⓞ -31- | WT NT | | 17W | 3000K | 38° | 500mA | 2130Lm | 93% |
| | A332-2- Ⓞ -32- | WT NT | | 17W | 4000K | 38° | 500mA | 2160Lm | 93% |

LED | 220-240V~ | CE | IP20 | CRI>90 | L80B10 >60.000h



Ⓞ *OPTIONS

| | |
|---|----------|
| 1 | No DIM |
| 2 | DIM DALI |


ACCESSORY

SIX M High Chromatic LED**

NOT SOLD SEPARATELY



SIX M RECESSED

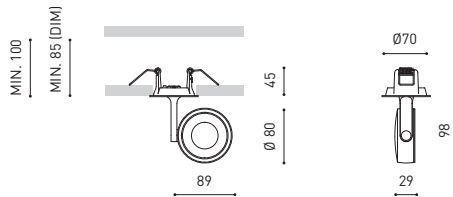

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL | AL | PC |

ⓘ >> 368


** ACCESSORY & COLOURS AFFECTS THE LIGHTING PARAMETERS

Ⓞ & [Battery Icon] >> PLEASE CONSULT



| | | P | CCT | Beam | I | Flux | LOR |
|--------------------------|--------------------------|------|-------|------|-------|--------|-----|
| SIX S Recessed | A334-0- Ⓞ -10- WT NT | 8,5W | 2700K | 17° | 500mA | 1030Lm | 86% |
| | A334-0- Ⓞ -11- WT NT | 8,5W | 3000K | 17° | 500mA | 1070Lm | 86% |
| | A334-0- Ⓞ -12- WT NT | 8,5W | 4000K | 17° | 500mA | 1100Lm | 86% |
| | A334-0- Ⓞ -20- WT NT | 8,5W | 2700K | 24° | 500mA | 1030Lm | 84% |
| | A334-0- Ⓞ -21- WT NT | 8,5W | 3000K | 24° | 500mA | 1070Lm | 84% |
| | A334-0- Ⓞ -22- WT NT | 8,5W | 4000K | 24° | 500mA | 1100Lm | 84% |
| | A334-0- Ⓞ -30- WT NT | 8,5W | 2700K | 34° | 500mA | 1030Lm | 89% |
| | A334-0- Ⓞ -31- WT NT | 8,5W | 3000K | 34° | 500mA | 1070Lm | 89% |
| | A334-0- Ⓞ -32- WT NT | 8,5W | 4000K | 34° | 500mA | 1100Lm | 89% |

LED | 220/240 V~ | CE IP20 | CRI>90 | L80B10 >60.000h |
 MacAdam Step 2 | OPTIONS* | INCL | Ø50 | 350° | 310° | 17° / 24° / 34°

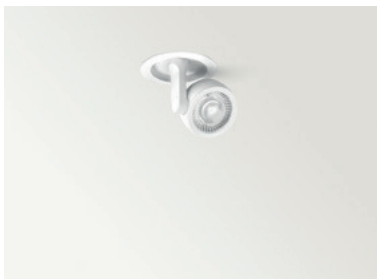

| | | P | CCT | Beam | I | Flux | LOR |
|---------------------------|--------------------------|------|-------|------|-------|-------|-----|
| SIX XS Recessed | A336-0- Ⓞ -10- WT NT | 4,5W | 2700K | 17° | 500mA | 470Lm | 90% |
| | A336-0- Ⓞ -11- WT NT | 4,5W | 3000K | 17° | 500mA | 500Lm | 90% |
| | A336-0- Ⓞ -12- WT NT | 4,5W | 4000K | 17° | 500mA | 530Lm | 90% |
| | A336-0- Ⓞ -20- WT NT | 4,5W | 2700K | 23° | 500mA | 470Lm | 86% |
| | A336-0- Ⓞ -21- WT NT | 4,5W | 3000K | 23° | 500mA | 500Lm | 86% |
| | A336-0- Ⓞ -22- WT NT | 4,5W | 4000K | 23° | 500mA | 530Lm | 86% |
| | A336-0- Ⓞ -30- WT NT | 4,5W | 2700K | 34° | 500mA | 470Lm | 88% |
| | A336-0- Ⓞ -31- WT NT | 4,5W | 3000K | 34° | 500mA | 500Lm | 88% |
| | A336-0- Ⓞ -32- WT NT | 4,5W | 4000K | 34° | 500mA | 530Lm | 88% |

LED | 220/240 V~ | CE IP20 | CRI>90 | L80B10 >60.000h |
 MacAdam Step 2 | OPTIONS* | INCL | Ø50 | 350° | 310° | 17° / 23° / 34°


| Ⓞ | *OPTIONS |
|---|----------|
| 1 | No DIM |
| 2 | DIM DALI |

ACCESSORIES

SIX High Chromatic LED**

NOT SOLD SEPARATELY

LED i » 366

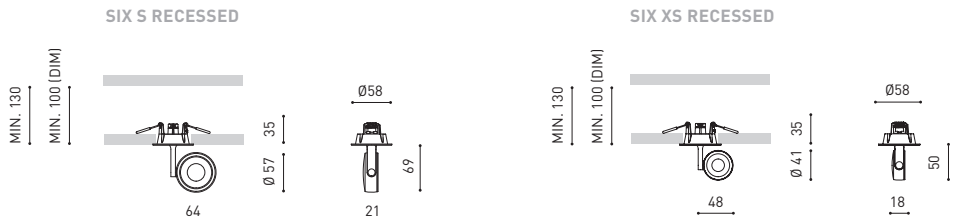

Pending

COLOUR | WT RAL 9016 | NT RAL 9005 | MATERIAL | AL | PC | i » 368

** ACCESSORY & COLOURS AFFECTS THE LIGHTING PARAMETERS

& » PLEASE CONSULT