



FIRST SINGLE DL



LED Design | Made In Finland


FIRST SINGLE DL

Input Power	LED Module Options	Color Consistency	Installation Type	Material	Beam Angles		Luminaire Color
220 – 240V	CRI 80+ 2700K, 3000K, 3500K, 4000K, 5000K CRI 90+ 2700K, 3000K B.BBL, 3500K B.BBL, 4000K, 5000K	2-Step MacAdam	Recessed, Ceiling Mounted Luminaire	Powder Painted Die-Cast Aluminum	1206 COB S 10° NFL 24° FL 30° WFL 50°	1212 COB S 20° NFL - FL 40° WFL 60°	White (RAL 9016) Silver (Ca. RAL 9006) Black (RAL 9005)

Output Current / Module Wattage / System Wattage:	LED Module Luminous Flux – 1206 Die Configuration:				300mA – 1050mA		
	CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
550mA / 19W / 21W	3 025Lm	3 175Lm	3 200Lm	2 450Lm	2 425Lm	2 525Lm	2 725Lm
850mA / 31W / 34W	4 275Lm	4 500Lm	4 550Lm	3 450Lm	3 450Lm	3 600Lm	3 850Lm
1050mA / 39W / 43W	5 075Lm	5 350Lm	5 400Lm	4 125Lm	4 150Lm	4 325Lm	4 575Lm

Output Current / Module Wattage / System Wattage:	LED Module Luminous Flux – 1212 Die Configuration:				300mA – 1400mA		
	CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
550mA / 18W / 20W	3 150Lm	3 300Lm	3 325Lm	2 550Lm	2 525Lm	2 600Lm	2 850Lm
850mA / 29W / 32W	4 700Lm	4 950Lm	4 975Lm	3 825Lm	3 775Lm	3 900Lm	4 250Lm
1400mA / 49W / 55W	7 325Lm	7 700Lm	7 750Lm	5 975Lm	5 850Lm	6 075Lm	6 600Lm

Technical Dimensions:

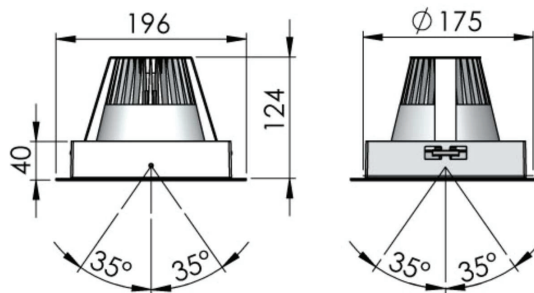

IP20