



Torino Sport Led



A modern luminaire with high optical and technical parameters designed for sports facilities (for example: tennis and squash courts). Characterized by symmetrically placed aluminum louvers and protection grid. The luminaire has IK10 degree of impact resistance.

Torino Sport LED is certified for IK and against ball throwing (DIN 18032-3:1997-04 and DIN EN 13964:2014-08)

Materials: Powder painted steel sheet body in white colour, parabolic (PAR) louver made of anodized, polished aluminum of high purity and MPRM diffuse. Protection grid.

Installation: Surface mounted.

Power: 230 V

ELECTRICAL DATA

Light source	LED
Type of equipment	AC
For emergency lighting	Yes
Voltage rating	220 ... 240 V
Through-wiring	Yes
Light source included	Yes
Power factor	0.97

MECHANICAL DATA

Type of installation	Ceiling mounted
Housing material	Steel sheet
Electrical track connection	No

INFORMATION

Colour	White
--------	-------



CERTIFICATES

Degree of protection (IP)	IP20
Impact resistance	IK10
Class of protection	I
Light source protection	Yes
CE	Yes
HACCP+	Yes
BALL TEST	Yes
EAC	Yes

LIGHT DATA

Luminaire's luminous efficiency	78 %
Light colour	White
Color rendering index	83
Light distribution	Mid beam
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 52000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	89 %


OPTICAL DATA

Louver/ shutter	PAR
Diffuser colour	Transparent
Diffuser material	Prismatic plastic
Louver material	Aluminum
Reflector	High gloss

AVAILABLE VARIANTS

Product code	Luminaire power [W]	LED modules	Light source power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Info	Weight [kg]
CS001.1133.830.A000 PX3750915	50	2x	2x25	6000	120	3000K	-	9.00
CS001.1133.840.A000 PX3750922	50	2x	2x25	6150	123	4000K	-	9.00
CS002.1133.830.A000 PX3750901	100	4x	4x25	12060	121	3000K	-	15.00
CS002.1133.840.A000 PX3750908	100	4x	4x25	12300	123	4000K	-	15.00
CS003.1133.830.A000 PX3750929	145	4x	4x36.25	19500	134	3000K	Premium	15.00
CS003.1133.840.A000 PX3750936	145	4x	4x36.25	20000	138	4000K	Premium	15.00



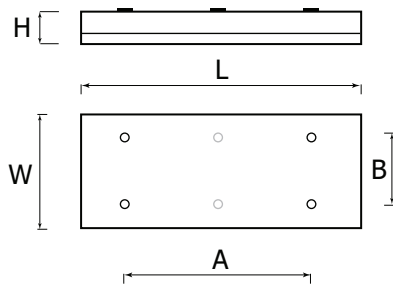

DIMENSIONS

Product code	L [mm]	W [mm]	H [mm]
CS001.1133.830.A000 PX3750915	1226	274	65
CS001.1133.840.A000 PX3750922	1226	274	65
CS002.1133.830.A000 PX3750901	1226	486	65
CS002.1133.840.A000 PX3750908	1226	486	65
CS003.1133.830.A000 PX3750929	1226	486	65
CS003.1133.840.A000 PX3750936	1226	486	65

L = Length | W = Width | H = Height / Depth

MOUNTING HOLES

Product code	A [mm]	B
CS001.1133.830.A000 PX3750915	940	180
CS001.1133.840.A000 PX3750922	940	180
CS002.1133.830.A000 PX3750901	940	300
CS002.1133.840.A000 PX3750908	940	300
CS003.1133.830.A000 PX3750929	940	300
CS003.1133.840.A000 PX3750936	940	300

A = Spacing length | B = Spacing width

Wersja 2x



Ramka IK10

